


## Duplex Armored Cable

### Application:

The product is especially suitable for FTTX, from residence to data center and cabling level and vertical. Which is used for communications in data center, during ODF with armored patch cord and pigtail. And also be used in the open field, connections between optical equipments.

### Cable Structure:

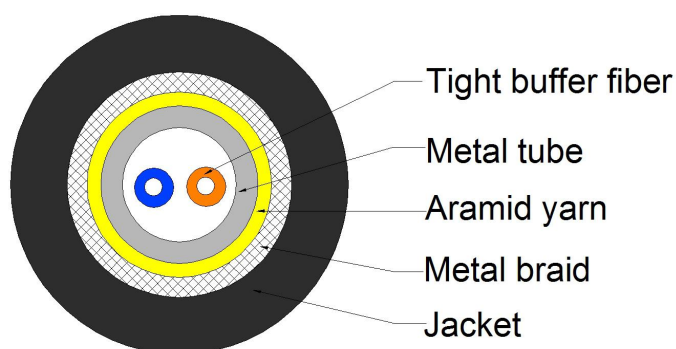

### Standard Reference:

RoHS , YDT 1258.4-2005

### Transmission performance:

Fiber Type	62.5 $\mu$ m(OM1)	50 $\mu$ m(OM2)	50 $\mu$ m(OM3)	G652
	(850/1300nm)	(850/1300nm)	(850/1300nm)	(1310/1550nm)
Max. Attenuation(dB/km)	3.5/1.5	3.5/1.5	3.5/1.5	0.8/0.6
Typical. Attenuation(dB/km)	3.5/1.5	3.0/1.0	3.0/1.0	0.4/0.3
LED Min. Bandwidth (MHz*km)	200/500	500/500	1500/500	---

\* Other type of optical fiber can be used according to customer's requirements.

### Cable Parameters:

Fiber core	Tension(N)		Crush(N/100mm)		Min. Bending Radius(mm)		Dia. (mm)	Weight (kg/km)
	Short	Long	Short	Long	Dynamic	Static		
2	400	200	5000	3000	20	10	3.0	21
2	400	200	5000	3000	20	10	3.2	22

\* The cable parameters are typical values and should be adjusted according to the actual situation.

\*\* The cable can be designed according to customer's requirements.